


# 3.5mm Stereo Jack

161-7400-EX

**KOBI**CONN

3.5mm Stereo Jack

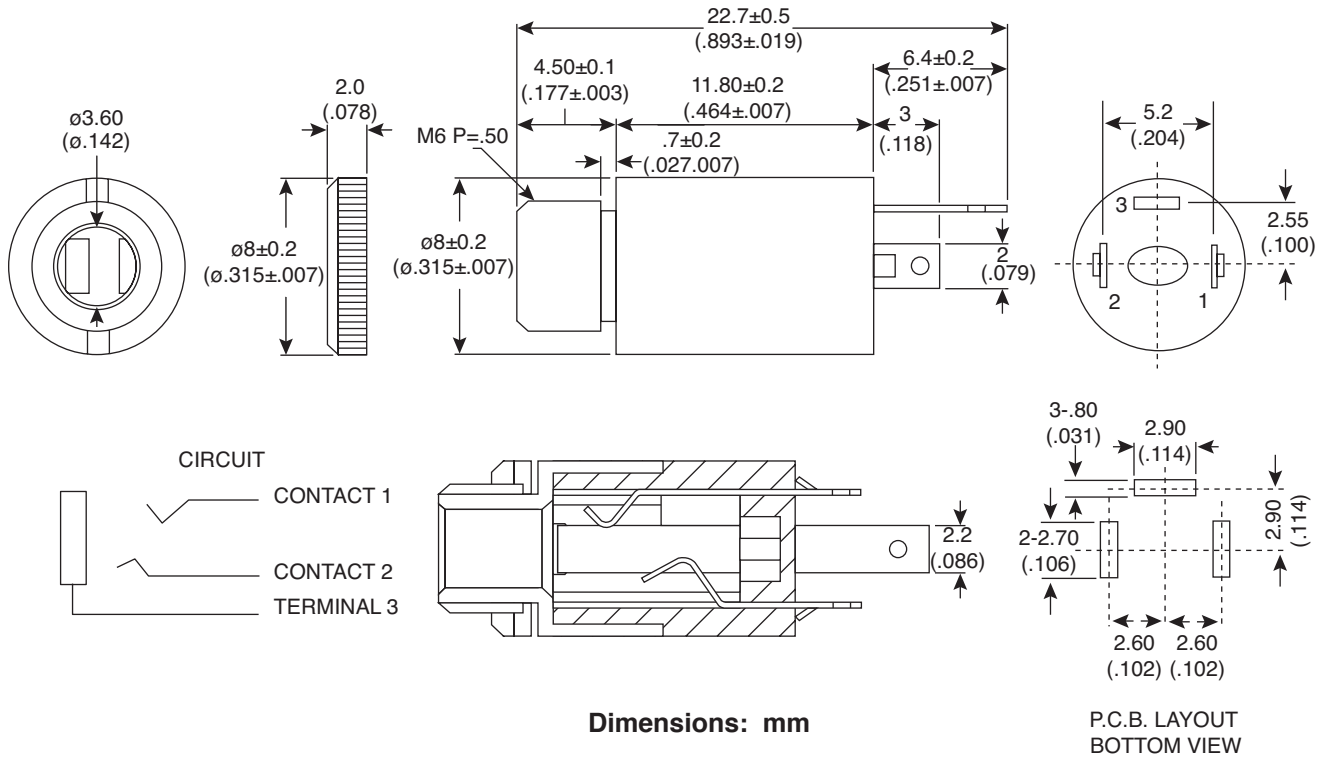

SPECIFICATIONS	
<b>Contact Resistance:</b>	50mΩ max.
<b>Insulation Resistance:</b>	100MΩ min. @ 500VDC
<b>Dielectric Voltage:</b>	500VAC for 1 minute
<b>Life Cycle:</b>	1,000 cycles min.
<b>Operations Temperature Range:</b>	-25°C ~ 80°C
<b>Insertion/Extraction Force:</b>	5N-20N (0.5 kgf.-2 kgf.)
<b>Contacts:</b>	Nickel Plated brass #1 & 3, Cold Plated #2
<b>Body:</b>	PBT-G30%
<b>Electrical Rating:</b>	34VDC/VAC @ 1A
<b>Rating:</b>	34VAC/DC, 1A
<b>Mating Plugs:</b>	17PP004-EX, 171-3300-EX, 171-3301-EX, 171-3308-EX
<b>Threadsize:</b>	M6 P=0.5
RoHS Compliant by Exemption	

Date Last Revised: 07-19-11

Available from Mouser Electronics  
1-800-346-6873 / www.mouser.com

KC-300830

161-7400-EX

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Kobiconn:](#)

[161-7400-EX](#)